
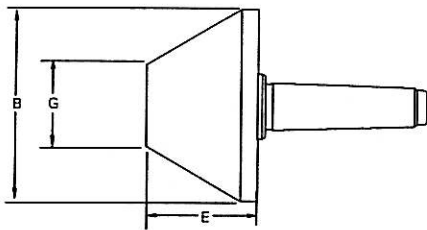


# BULL HEAD LIVE CENTERS

**ROYAL**  
PRODUCTS

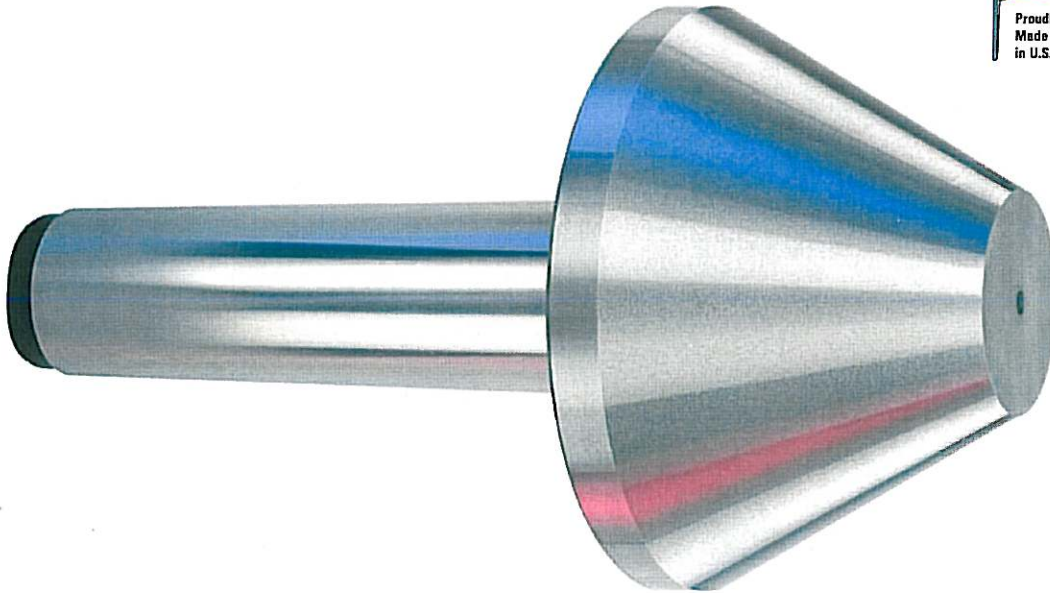

## Royal Bull Head Live Centers

TAPER	B	E	G	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	PART NUMBER
3 MT	3.15	2.52	1.00	5,000	615	1,780	10902
3 MT	4.15	3.01	1.25	4,500	860	2,550	10903
4 MT	4.15	3.01	1.25	4,500	860	2,550	10904
5 MT	4.15	3.01	1.25	4,500	860	2,550	10905
4 MT	5.15	3.17	2.00	4,000	1,145	3,450	10906
5 MT	5.15	3.17	2.00	4,000	1,145	3,450	10907
5 MT	6.15	3.60	2.50	3,500	1,450	4,500	10909
6 MT	6.15	3.60	2.50	3,500	1,450	4,500	10910

\* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.