



HEAVY-DUTY SPINDLE TYPE LIVE CENTERS

ROYAL
PRODUCTS



**EXCLUSIVE ROYAL
ROTO-SHIELD™
TECHNOLOGY**

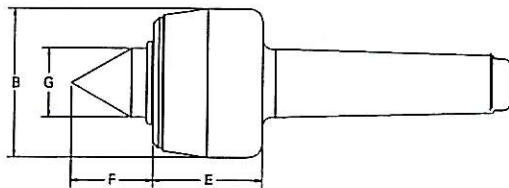

**✓ High-Pressure
Coolant Approved**

Royal Heavy-Duty Spindle Type Live Centers

TAPER	B	E	F	G	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	CATALOG NO.
2 MT	1.75	1.47	1.01	0.88	6,000	725	2,360	10102
3 MT	2.33	1.75	1.22	1.00	5,000	970	3,900	10103
4 MT	2.68	1.98	1.48	1.25	4,500	1,720	4,050	10104
5 MT	3.45	2.81	1.84	1.50	3,500	3,260	5,700	10105
6 MT	4.00	3.15	2.31	2.00	3,500	4,080	6,000	10106

* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.

Insist on Roto-Shield™ Technology – Only Available on Royal Live Centers