



# HEAVY-DUTY CNC SPINDLE TYPE LIVE CENTERS



**EXCLUSIVE ROYAL  
ROTO-SHIELD™  
TECHNOLOGY**



**✓ High-Pressure  
Coolant Approved**

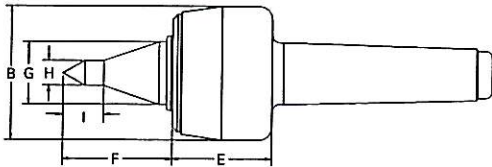

## Royal Heavy-Duty CNC Spindle Type Live Centers

TAPER	B	E	F	G	H	I	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	PART NUMBER
2 MT	1.75	1.47	1.35	0.88	0.38	0.63	6,000	375	2,360	10212
3 MT	2.33	1.75	1.86	1.00	0.38	0.63	5,000	740	3,900	10213
4 MT	2.68	1.98	2.18	1.25	0.50	0.81	4,500	1,120	4,050	10214
5 MT	3.45	2.81	2.58	1.50	0.50	0.81	3,500	1,930	5,700	10215
6 MT	4.00	3.15	3.00	2.00	0.75	1.28	3,500	2,420	6,000	10216

\* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.

***Insist on Roto-Shield™ Technology - Only Available on Royal Live Centers***