
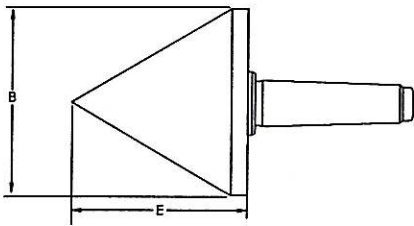


# PIPE HEAD LIVE CENTERS

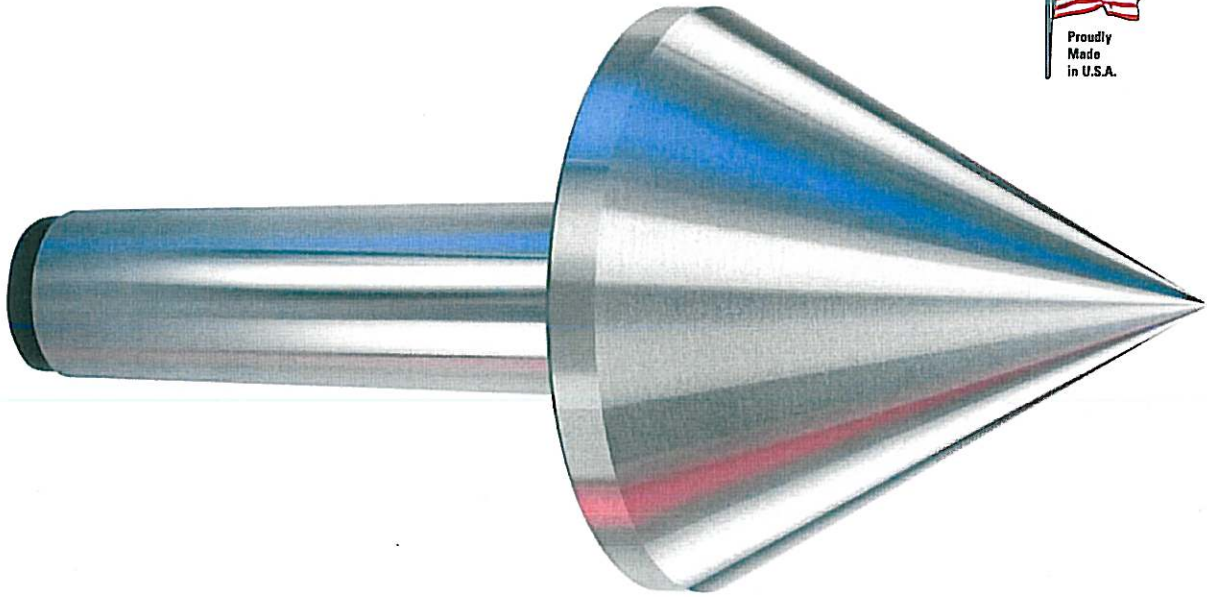

## Royal Pipe Head Live Centers

TAPER	B	E	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	PART NUMBER
2 MT	3.15	3.39	5,000	475	1,780	10701
3 MT	3.15	3.39	5,000	475	1,780	10702
4 MT	4.15	4.10	4,500	630	2,550	10704
5 MT	4.15	4.10	4,500	630	2,550	10705
4 MT	5.15	4.90	4,000	845	3,450	10706
5 MT	5.15	4.90	4,000	845	3,450	10707

\* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.