



# SUPER-QUAD EXTRA HEAVY-DUTY LIVE CENTERS



**EXCLUSIVE ROYAL  
ROTO-SHIELD™  
TECHNOLOGY**

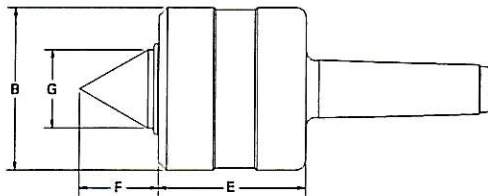

**✓ High-Pressure  
Coolant Approved**

## Royal Super-Quad Extra Heavy-Duty Live Centers

TAPER	B	E	F	G	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	PART NUMBER
4 MT	3.70	3.31	1.77	1.63	4,000	3,325	4,800	10364
5 MT	4.94	4.45	2.39	2.38	3,000	10,650	13,220	10365
6 MT	4.94	4.33	2.39	2.38	3,000	10,650	13,220	10368
6 MT	6.94	5.69	3.23	3.13	2,500	12,130	25,920	10366

\* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.

***Insist on Roto-Shield™ Technology - Only Available on Royal Live Centers***